




CUTTING GROUP

UBS  
200

DOUBLE CUTTING MACHINE  
( HYDRO PNEUMATIC )

PVC

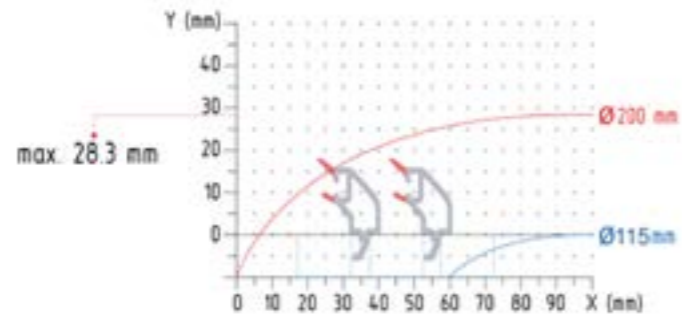

TECHNICAL SPECIFICATIONS

- Adjustable mold to each lath
- Cuts the glass slats of PVC joinery
- Fully safe against work accidents
- Electropneumatically controlled
- Cutting angle: 45° (Both ends)
- Cutting speed: 5 seconds
- Cuts both ends at the same time
- Standard meter and profile conveyor system
- Cutting speed adjustable
- Design in accordance with CE norms


TECHNICAL DATA

TECHNICAL FEATURES							
				BAR	Air cons.		
UBS 200	0,75 kW x 2 400V 50Hz	D: 200mm (max) d: 32mm	3000 D/min. RPM	6-8 Bar	35 Lt/min.	93x53x120 cm	102 kg

GLAZING BEAD SAW MACHINE. 4 SAW

CKY  
501

PVC

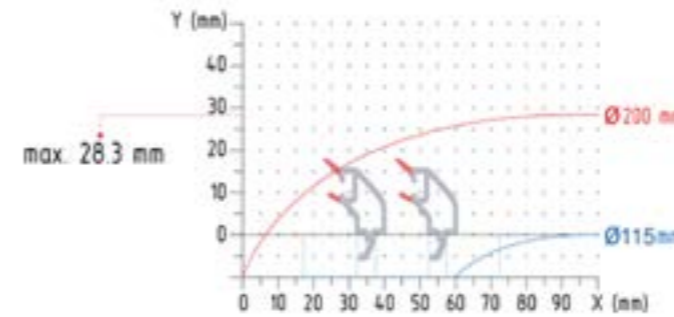

TECHNICAL SPECIFICATIONS

- Automatically cuts the glazing beads made of PVC or Aluminum.
- Protected against operation accidents.
- Electropneumatic controlled.
- Cutting angle :45°
- Time 5 seconds are sharp.
- Has 4 disks of asaw.
- Adjustment of speed are sharp.
- Both ends are cutoff simultaneously.
- Convenient system of replacementa template.
- Standard measuring and conveyorsystem.
- Designed in accordance with the CE rules.

TECHNICAL DATA

TECHNICAL FEATURES							
				BAR	Air cons.		
CKY 501	0.75 kW x 2 400V 50Hz	D=200 mm d=32 mm	3000 D/min. RPM	6-8 Bar	35 Lt/min.	98x53x120 cm	102 kg