

COPY+DRAINAGE ROUTER MACHINES WITH TRIPLE DRILLING UNIT

COPY ROUTER MACHINES




PVC




ALU

PVC

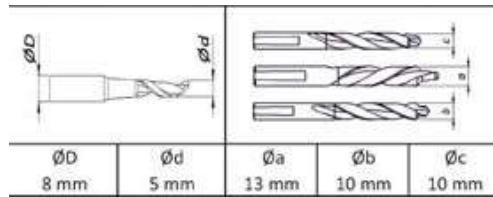

TECHNICAL SPECIFICATIONS

- For opening holes of door handle and sash fastener channels
- Three drills for drilling handle holes,
- Designed in accordance with the CE.
- For Drilling the water drain slots on the PVC profiles,
- Operational safety.
- The selection of motor is done by the selector switches.
- Profile tightness operation controlled with hand command valve mounted on the body.
- Available pneumatic tighten system.
- The milling heads can freely be adjustable in angle, depth and height.
- Opens water slots in two sides by a single button at once.
- With adjustable feet of the machine easy to locate on the floor,
 - Operation time: 10 seconds
- Machine for reductor.



TECHNICAL SPECIFICATIONS

- For opening holes of door handle and sash fastener channels
- Designed in accordance with the CE
- For Drilling the water drain slots on the PVC profiles,
- Operational safety.
- The selection of motor is done by the selector switches.
- Profile tightness operation controlled with hand command valve mounted on the body.
- Available pneumatic tighten system.
- The milling heads can freely be adjustable in angle, depth and height.
- Opens water slots in two sides by a single button at once.
- With adjustable feet of the machine easy to locate on the floor,
 - Operation time: 10 seconds.

TECHNICAL DATA									
TECHNICAL FEATURES									
						BAR	Air cons.		
SE 510	0.65 kW 14000 d/min.	1.1 kW 380V 50Hz	0.65 kW 14000 d/min.	14000 d/min.	1500 d/min.	6-8 Bar	5 Lt/min.	103x66x140 cm	90 kg

TECHNICAL DATA						
TECHNICAL FEATURES						
			BAR	Air cons.		
CF 600	1.1 kW 400V 50Hz	11000 d/min.	6-8 Bar	5 Lt/min.	56x70x140	77 kg