

ALU

PVC




TECHNICAL SPECIFICATIONS

- 1 pc. Vertical and 1 horizontal copy milling motor are available. (1 x 2 kW & 1 x 1.1kW 18.000 rpm)
- It can process 3 sides of the PVC profile quickly and precisely without turning it.
- There are 4 pneumatic clamps, 2 vertical and 2 horizontal.
- The inserts are available in 3 different diameters as Ø11, Ø16 and Ø18.
- Provides ease of use with its ergonomic handle design
- There is a metering and holding system on the right and left sides.

TECHNICAL DATA						
TECHNICAL FEATURES						
			BAR	Air cons.		
PDM 100	2 kW x 1 1.1 kW x 1 220V 300Hz	18000 RPM	6-8 Bar	8 Lt/min.	90x70x160 cm	150 kg

PVC

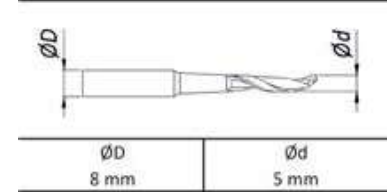

TECHNICAL SPECIFICATIONS

- Three routing units, one oblique unit til table up to 60 degrees, one horizontal unit and one vertical one.
- The routing units are independent, can be used to get her and separately from each other.
- Automatic working cycle.
- Adjustable operation speed.
- System for automatic drilling for symetric slots.
- PLC control system.
- Horizontal pneumatic clamping kit.
- Adjustable operation depth.
- High frequency motors.

TECHNICAL DATA								
TECHNICAL FEATURES								
					BAR	Air cons.		
SO 510	0.55 kW 230V 400 Hz	0.55 kW 230V 400Hz	0.55 kW 230V 400Hz	24000 d/RPM	6-8 Bar	5 Lt/min.	68x80x140 cm	90 kg