



CUTTING GROUP

PK 503






AUTOMATIC CUTTING MACHINE

AUTOMATIC CUTTING MACHINE

PK 503 - DS

ALU PVC

ALU PVC

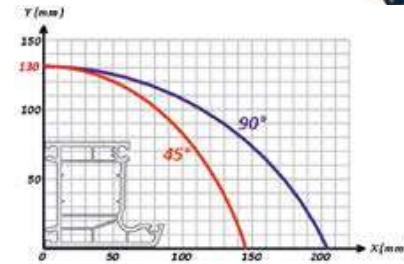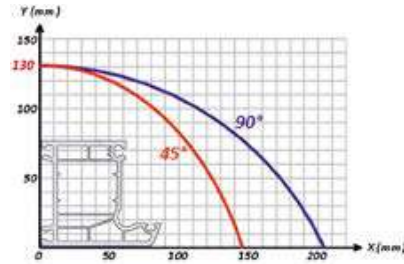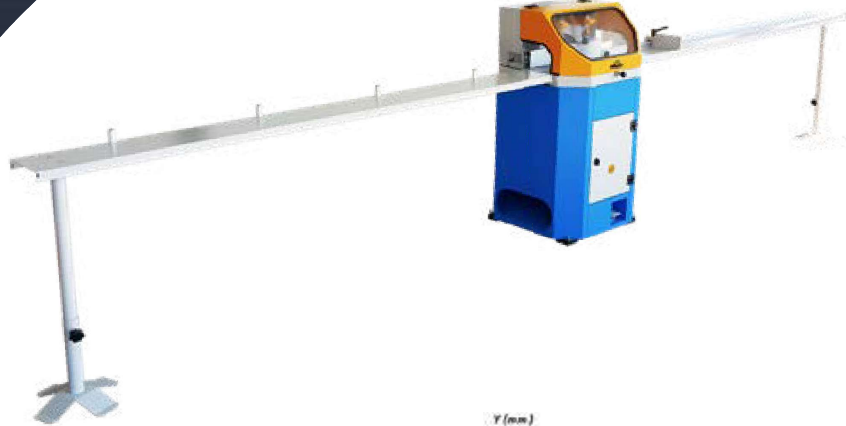

TECHNICAL SPECIFICATIONS

- Designed for cutting processes of aluminium and plastic profiles
- Specially alloyed aluminium table, strong sheet cabin, long-lasting electrostatic paint
- Pneumatic cutting process, automatic running system
- Protection cover with security switch
- Adjustment of cutting speed according to profile
- Cutting feature to left and right at standard
- 15° - 22,5° - 30° - 45° - 90° free cutting at various angles
- Cabin bands which are adjustable to ground and isolate vibration
- Designed in accordance with the CE

TECHNICAL SPECIFICATIONS

- Designed for cutting processes of aluminium and plastic profiles
- Specially alloyed aluminium table, strong sheet cabin, long-lasting electrostatic paint
- Pneumatic cutting process, automatic running system
- Protection cover with security switch
- Adjustment of cutting speed according to profile
- Cutting feature to left and right at standard
- 15° - 22,5° - 30° - 45° - 90° free cutting at various angles
- Cabin bands which are adjustable to ground and isolate vibration
- Designed in accordance with the CE

TECHNICAL DATA

TECHNICAL FEATURES							
	BAR	Air cons.	WxLxH	KG			
PK 403	1.5 kW 400V 50Hz	D=450 mm d=32 mm	3000 D/min. RPM	6-8 Bar	35 Lt/min.	68x77x120 cm	155 kg

TECHNICAL DATA

TECHNICAL FEATURES							
	BAR	Air cons.	WxLxH	KG			
PK 403-DS	1.5 kW 400V 50Hz	D=450 mm d=32 mm	3000 D/min. RPM	6-8 Bar	35 Lt/min.	70x88x115 cm	172 kg